

Electrak[®] HD Actuators

Tested to Endure the Harshest of Environments and Conditions



Built to Perform, Tested to Last

Noise Filter Off

Thomson Electrak HD industrial linear actuators continue to find their way into more and more machine designs thanks in part to their heavy duty construction and unparalleled durability. Their performance capabilities are no accident, however. Electrak HD actuators have undergone extensive testing during the development process and passed the toughest technical and environmental standards. These measures help ensure customers benefit from:

- 100% performance-tested actuators
- peace of mind in Electrak HD's daily performance
- long, trouble-free and safe operation
- superior total cost of ownership

Thomson has been manufacturing industrial linear actuators for nearly 50 years, and we understand which tests are necessary to qualify our products for a variety of applications. It's not enough to build a product that will operate in a clean, indoor "lab" environment. Our actuators are used on heavy duty agricultural and construction equipment that operates outdoors in the dirt and mud, and it's not uncommon for operators to use these products as steps or take a hammer to them. In short, our superior test standards ensure that Thomson actuators can withstand whatever punishment our customers, or the environment, may inflict.



"inurpose a

Superior Function Through Superior Testing

Fine

inurpose b

The Thomson Test Standard is a 40-day test platform that takes the Electrak HD through some of the harshest conditions imaginable. From hot to cold, wet to dusty, heavy vibration to dropped on the floor, we inflict punishment on our design in an effort to match the real-world environment that our units may be forced to withstand. The cost of a test platform of this magnitude can range from \$75,000-100,000 at an independent lab. Thomson saves their customers this substantial expense by completing testing up front using an independent lab with a common report format.

Development Testing Overview

Environmental Protection	EN60529, DIN40050-9, ASTM B117-11, ISO 15003
Mechanical Function	EN60068-2-27, EN60068-2-32
Electrical Function	ISO 7637-2, ISO 13766, ISO 10605, EN60068-2-1/-2-2



Thomson Electrak® HD Actuator Performance Testing Standards and Test Procedures v1.0

> THOMSON Linear Motion. Optimized."

All of the relevant standards and testing procedures used for Electrak HD are described in the Performance Testing Standards and Test Procedures. This document is constantly being updated as Electrak HD evolves to meet new standards and tougher customer demands, and take advantage of new technologies.

Want to know more about Electrak HD? Visit www.thomsonlinear.com/hd to learn about all of its advantages, download the brochure and 3D models, watch instructional videos, use our

selector and more. You can also request a copy of the Performance Testing Standards and Test

Procedures (pictured) via the site's Contact Us page.



Quality Control and Production Testing

We validate Electrak HD through an extensive end-of-line test procedure to ensure that each and every actuator produced meets and exceeds your expectations. We also perform a detailed inspection on the components used to build it.

Production Test Highlights

- Ball screw straightness
- Load holding brake test
- Surface treatment check
- Bolt tightening torque
- Final inspection
 - movement
 - retract length
 - stroke Length
 - no load speed
 - loaded speed
 - overload trip point

00

MAGZA


- end play
- PCB functions
- FLUK-sound level

Superior Protection Ensures Reliable Operation

Robust and reliable operation, even in demanding environments, has been a hallmark of Thomson's industrial linear actuators. With Electrak HD, we've taken environmental protection to the next level by subjecting it to some of the harshest conditions imaginable throughout our rigorous test protocol.

Passed Development Tests Highlights

- Operational low temperature (-40°C for 96 hours)
- Operational high temperature (+85°C for 96 hours)
- Hose washing (IPx6)
- Submersion (IPx7)
- High-pressure washing (IPx9k)
- Dust ingress (IP6x)
- Salt environment (500 hours)
- Chemical resistance
- diesel
- hydraulic oil
- brake oil
- ethylene glycol
- urea nitrogen
- diesel exhaust fluid
- NPK fertilizer*9

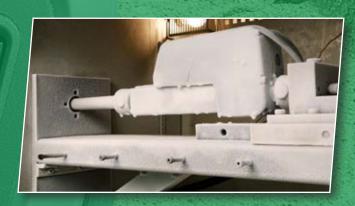

MEX (55) 53 63 23 31 MTY (81) 83 54 10 18 QRO (442) 1 95 72 60 ventas@industrialmagza.c

www.thomsonlinear.com/hd

Guaranteed Performance with No Surprises

Electrak HD is designed around consistent and reliable performance. Load, speed, current and duty cycle are among the many specifications that we guarantee will be consistent throughout Electrak HD's entire life. These parameters are tested to some of the strictest values in the industry.

Passed Development Tests Highlights

- Random vibration immunity
- Operational shock immunity
- Handling/drop shock immunity
- Life expectancy
- Duty cycle
- Static maximum load capacity
- Dynamic maximum load capacity
- Sound emission
- Speed variation
- Current draw
- Operational voltage
- Manual override function
- PCB function



Safe Operation in All Conditions

It doesn't matter how strong, sturdy or smart a product is if it isn't safe. Thomson's extensive testing ensures that Electrak HD continues to run safely in any application – keeping people, equipment and environments out of harm's way.

Passed Development Tests Highlights

- Operational over voltage
- Operational under voltage
- Operational reverse polarity
- Short circuit handling
- Operational electrostatic discharge
- End-of-stroke limit switch function
- Overload protection
- Duty cycle protection
- Static load holding brake test
- EMC tests
 - inductive load switching
- positive inductance transient test
- positive and negative coupling test
- cranking test
- load dump
- electromagnetic immunity
- conducted emissions
- radiated emissions




How Thomson Built a World-Class Linear Actuator

- 1. Start with the proven, rugged Electrak electric linear actuator.
- 2. Add state-of-the-art onboard controls, feedback, CAN bus J1939 and eliminate the need for standalone controls.
- 3. Boost the power, increase stroke lengths and reduce current draw.
- 4. Design it all into a more compact envelope with the best environmental protections on the market today.


INDUSTRY LEADING ONBOARD CONTROLS

The Electrak Modular Control System (EMCS) is the foundation of the best onboard controls available today for electric linear actuators and includes optional, built-in J1939 CAN bus support.

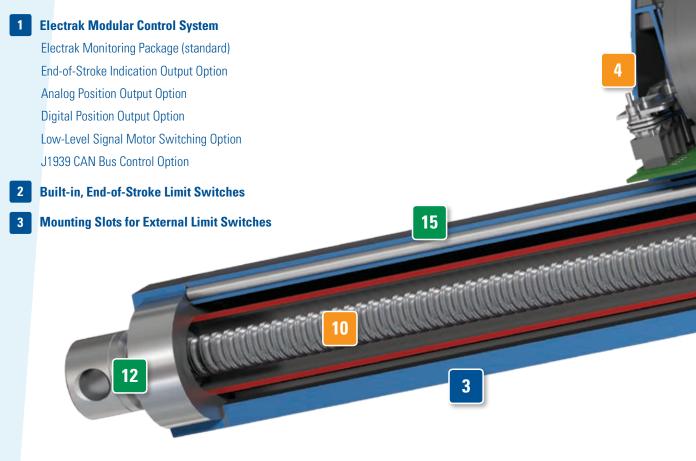

SUPERIOR PERFORMANCE

Higher power and longer stroke lengths enable Electrak HD to tackle applications outside the range of other electric linear actuators.

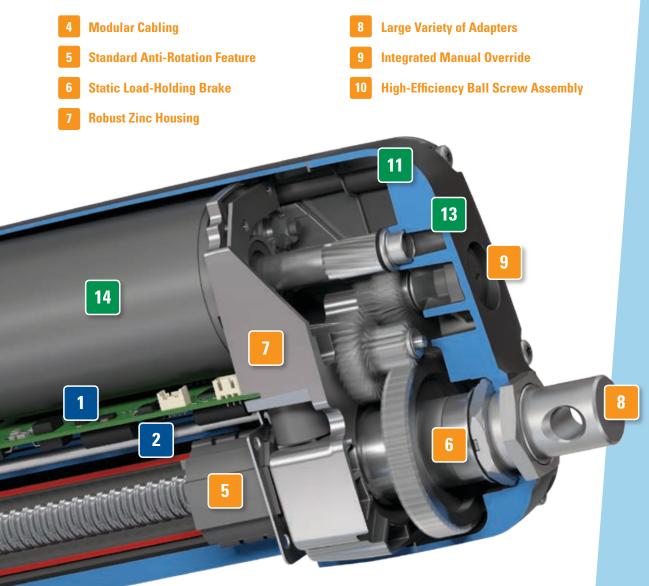

UNRIVALED ENVIRONMENTAL PROTECTION

Electrak HD is tested to meet and exceed the toughest OEM mechanical and electronic component acceptance tests in the market today.



IP67/IP69K Protection Class



Stainless Steel Extension Tube

13 Salt Spray Tested for 200 Hours



Large Operating Temperatur<mark>e Range</mark>



Hard-coat Anodized Aluminum Cover Tube

USA, CANADA and MEXICO

Thomson 203A West Rock Road Radford, VA 24141, USA Phone: 1-540-633-3549 Fax: 1-540-633-0294 E-mail: thomson@thomsonlinear.com Literature: literature.thomsonlinear.com

EUROPE

United Kingdom Thomson Office 9, The Barns Caddsdown Business Park Bideford Devon, EX39 3BT Phone: +44 (0) 1271 334 500 E-mail: sales.uk@thomsonlinear.com

Germany

Thomson Nürtinger Straße 70 72649 Wolfschlugen Phone: +49 (0) 7022 504 0 Fax: +49 (0) 7022 504 405 E-mail: sales.germany@thomsonlinear.com

France

Thomson Phone: +33 (0) 243 50 03 30 Fax: +33 (0) 243 50 03 39 E-mail: sales.france@thomsonlinear.com

Italy

Thomson Largo Brughetti 20030 Bovisio Masciago Phone: +39 0362 594260 Fax: +39 0362 594263 E-mail: info@thomsonlinear.it

Spain

Thomson E-mail: sales.esm@thomsonlinear.com

Sweden

Thomson Estridsväg 10 29109 Kristianstad Phone: +46 (0) 44 24 67 00 Fax: +46 (0) 44 24 40 85 E-mail: sales.scandinavia@thomsonlinear.com

ASIA

Asia Pacific Thomson E-mail: sales.apac@thomsonlinear.com

China

Thomson Rm 2205, Scitech Tower 22 Jianguomen Wai Street Beijing 100004 Phone: +86 400 6661 802 Fax: +86 10 6515 0263 E-mail: sales.china@thomsonlinear.com

India

Thomson c/o Fluke Technologies Pvt. Ltd. #424, Deodhar Center, Marol Maroshi Road, Andheri – E, Mumbai – 400059 India Phone: +91 22 29207641 E-mail: sales.india@thomsonlinear.com

Japan

Thomson Minami-Kaneden 2-12-23, Suita Osaka 564-0044 Japan Phone: +81-6-6386-8001 Fax: +81-6-6386-5022 E-mail: csjapan@scgap.com

Korea

Thomson F7 Ilsong Bldg, 157-37 Samsung-dong, Kangnam-gu, Seoul, Korea (135-090) Phone: +82 2 6917 5049 Fax: +82 2 528 1456 E-mail: sales.korea@thomsonliear.com

SOUTH AMERICA

Brazil

Thomson Av. Tamboré, 1077 Barueri, SP – 06460-000 Phone: +55 (11) 3616-0191 Fax: +55 (11) 3611-1982 E-mail: sales.brasil@thomsonlinear.com



Electrak_HD_Testing_BREN-0025-01A | 20160915KB Specifications are subject to change without notice. It is the responsibility of the product user to determine the suitability of this product for a specific application. All trademarks property of their respective owners. ©2016 Thomson Industries, Inc.



MAGZA



DISTRIBUIDOR MEX (55) 53 63 23 31 MTY (81) 83 54 10 18

Linear Motion. **Optimized**."